



TeleSpinIP

Professional Broadcast TV and
Teleprompting Hood Rotational module

Upgrade your current TelePrompting hood by adding our TeleSpinIP module to your existing Tripod or Pedestal. Can be remotely-operated using most PTZ camera controllers!




**Shown with PTZ Camera Controller,
TelePrompting hood, TalentMonitor
and Tripod (not included)**

- **Add 180-degree rotation to your existing PTZ TelePrompting hood**
- **Standard Dovetail mounting. Easily mounts to almost any Tripod**
- **75/100 mm VESA mounting to your TelePrompting hood**
- **Operates with almost any PTZ Camera controller**

TeleSpinIP:

- Remotely positionable for multiple talents
 - Standard dovetail mount adapts to almost any Tri-pod or pedestal
 - 75/100 mm VESA mounting to your PTZ TelePrompting hood
 - Quiet and smooth direct-drive operation
 - Extremely affordable option
 - Studio use or Portable for remote events
 - Repeatable shot recall using preset positioning
- Multiple Methods of Operation
 1. Operate using popular PTZ camera controllers or Broadcast Studio controllers that conform to VISCA-IP or VISCA-Serial Standards including:
Sony, BirdDog, PTZ Optics, RocoSoft, Creston, Ross Video, NewTek, Bolin--and others
 2. Free PC Software using our Free PresenterTek IP Controller Software

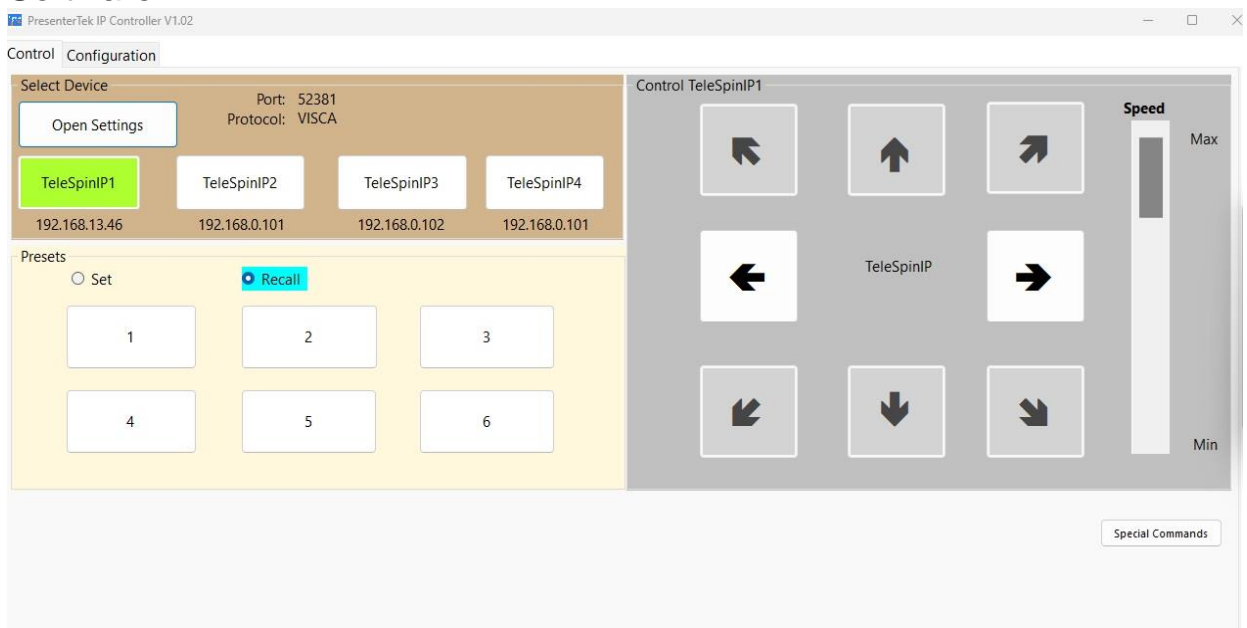

3. PresenterTek's Touch-Screen Controller



4. Manual Pan Left/Right Toggle Switch on unit

- Standard 10/100 Mbps Ethernet RJ45 input
- Built in HTML server and free PC based software for easy configuration to your LAN
- Automate studio production & reduce labor costs to achieve high ROI
- Perfect for live-stream events
- Manual toggle switch for Pan left/right
- Warranted for 3 years

What's Included:

- Pan Module
- Detachable top plate with 75/100 mm VESA mounting
- Hardware to attach top plate to Pan module
- 100/240 VAC IEC input Power Supply with 6' power cable
- Hardware and tools required for assembly

Specifications:

Rotation	+/- 90 degrees
Over-Rotation Protection	Left and right limit switches prevent over-rotation.
Rotation Speed	180 degrees in 8.5 Sec
Rotational repeatability	+/- 1 degrees
Payload	90 lbs.
Mounting to Teleprompting Hood and camera assemblies	VESA and additional camera mounting holes adapt to any standard 75- or 100-mm monitor mounting pattern, cheese plate or standard camera or prompter hood
Control	<ul style="list-style-type: none"> ❑ Wide variety of PTZ camera controllers that conform to either the VISCA-IP or VISCA-Serial standards ❑ PC Based Software ❑ Touchscreen Controller ❑ Manual toggle switch for Pan Left/Right
Control Interface	<ul style="list-style-type: none"> ❑ 10/100 Mbps Ethernet ❑ Standard RJ45 connector
LAN Configuration	<ul style="list-style-type: none"> ❑ Built in HTML server ❑ Free Windows based PC app ❑ Supported Protocols: <ol style="list-style-type: none"> 1. UDP 2. TCP/IP 3. Static IP
Power input	<ul style="list-style-type: none"> ❑ +24V, 3Pin XLR connector ❑ On/Off power switch ❑ Red power indicator LED
AC System Power	<ul style="list-style-type: none"> ❑ Input Voltage:100-240 VAC 50/60 Hz ❑ UL and CE certified external wall supply
Weight (not including PTZ Camera Hood)	<ul style="list-style-type: none"> ❑ 7lbs.
Certifications	RoHS compliant, UL-listed components. Power supply UL and CE approved.
Warranty	Three years from date of purchase, parts and labor

TeleSpinIP Dimensions

