




TeleStepper3 CAT# 6907 Setup Guide Standard Package Contents

| Quantity | Description |
|----------|---|
| 1 | Remote Control |
| 1 | Stand 1 |
| 1 | Stand 2 |
| 2 | Wall Power Supplies |
| 1 | 50 foot RJ45/Ethernet Cable (located in the case lid) |
| 2 | 10 foot RJ45/Ethernet Cable |
| 1 | RJ45 Coupler |
| 1 | 1/8" Hex Wrench |
| 2 | Mirror Clamps, Mic Adapters or PTZ / Plate Adapter |
| 2 | Baseplates |

Two Stand "Presidential System" Setup

- 1) Remove the two round baseplates, place them on the floor, side up as shown below:

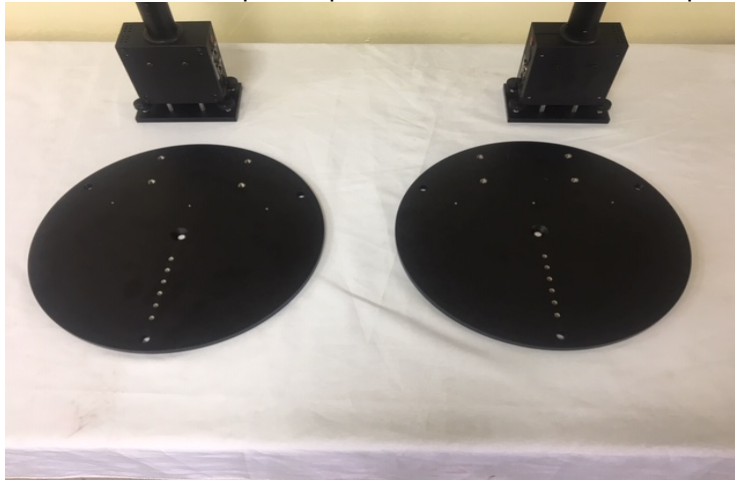


- 2) Remove the two Stands and place them on the baseplates. Align the Stands with the 4 thumbscrews as shown below:



Note: The two stands are unique, Stand 1 (for Remote Control) and Stand 2. Place labels toward speakers so the Stand connections are facing each other. (Stand 1 on the left and Stand 2 on the right with speaker facing stands).

Stand System Cabling, Step by Step Instructions

1) Install the Ethernet Cables as shown below:

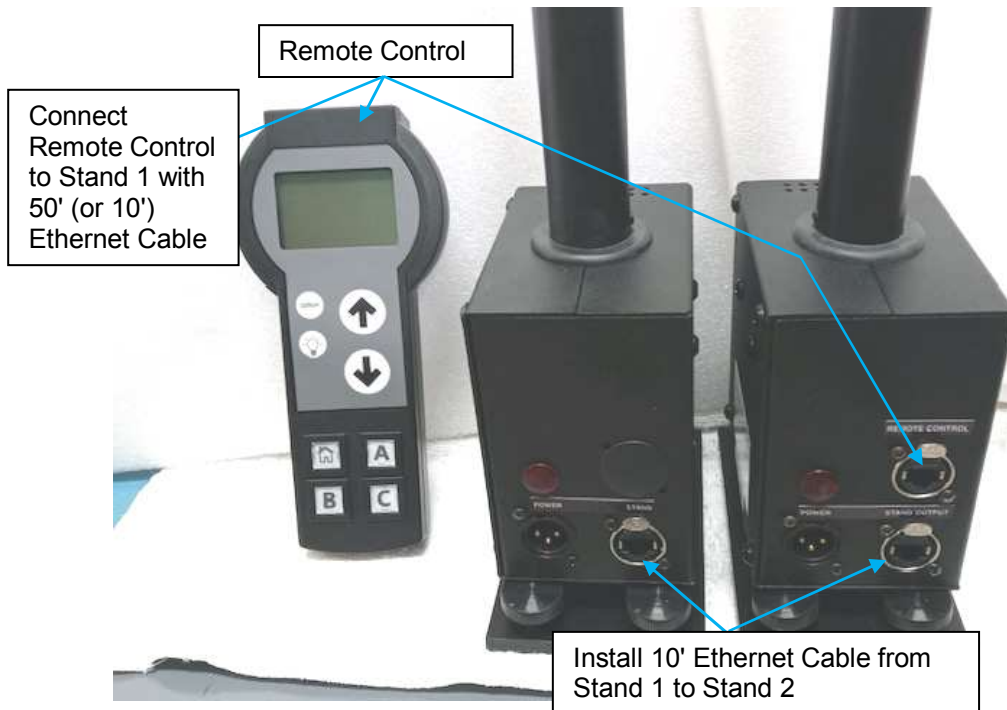

Warning!
Do not plug the Ethernet cable from the Stand's Remote port into any other Ethernet devices, Routers, PC ... The +24V power could damage these devices.

2) Install the Power Cables to each Stand and apply power as shown below:

