



TeleSpinIP

**Professional Broadcast TV and
Teleprompting Hood Rotational module**

Upgrade your current TelePrompting hood by adding our TeleSpinIP module to your existing Tripod or Pedestal. Can be remotely-operated using most PTZ camera or Broadcast studio controllers!




Shown with PTZ Camera Controller,
TelePrompting hood assembly, and Tripod
(not included)

- **Add 180-degree (240 optional) rotation to your existing PTZ TelePrompting hood**
- **Standard Dovetail mounting, or numerous 1/4-20 threaded holes, Allows mounting to any Tripod or Pedestal**
- **75/100 mm VESA mounting to your TelePrompting hood or monitor**
- **Operates with almost any PTZ Camera or Broadcast studio controller**

TeleSpinIP:

- Remotely positionable for multiple talents
 - Standard dovetail, or ¼-20 threaded mounting holes, adapts to any video Tripod or Pedestal
 - 75/100 mm VESA mounting to your TelePrompting hood. Additional holes provided for non-standard mounting patterns
 - Quiet and smooth direct-drive operation
 - Extremely affordable option to automate Broadcast Studios
 - Studio use or Portable for remote events
 - Repeatable shot recall using preset positioning
 - Heavy duty weight capacity
- Multiple Methods of Operation
 1. Operate using popular PTZ camera controllers or Broadcast Studio controllers that conform to VISCA-IP or VISCA-Serial Standards including:
Sony, BirdDog, PTZ Optics, RocoSoft, Creston, Ross Video, NewTek, Bolin--and others

2. Free PC Software using our Free PresenterTek IP Controller Software

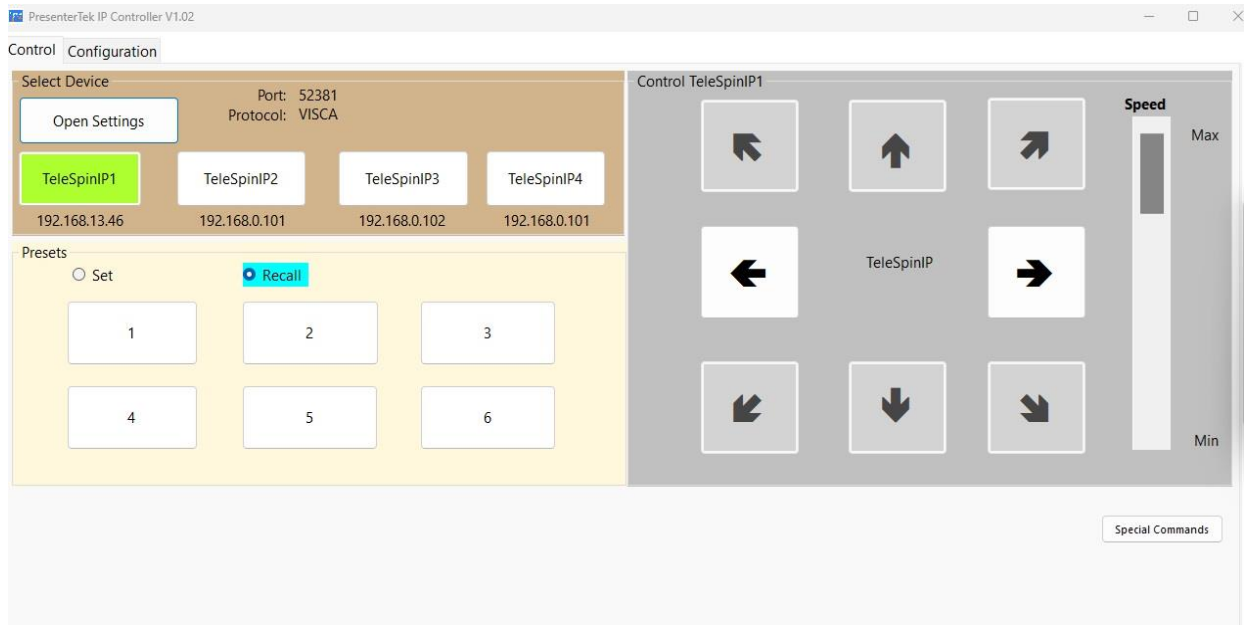

3. PresenterTek's Touch-Screen Controller PC



4. Manual Pan Left/Right Toggle Switch on unit

- Standard 10/100 Mbps Ethernet RJ45 input
- Built in HTML server and free PC based software for easy configuration to your LAN
- Automate studio production & reduce labor costs to achieve high ROI
- Perfect for live-stream events
- Manual toggle switch for Pan left/right
- Warranted for 3 years

What's Included:

- Heavy duty Pan Module
- Detachable Monitor Adapter Plate with 75 or 100 mm VESA mounting
- Power Strip on Monitor adapter plate for easy AC power connections
- Hardware to attach Pan module to Tripod/Pedestal
- IEC power chord for connection from monitor to TeleSpin's Power strip
- 100/240 VAC IEC input Power Supply with 6' IEC power cable
- Hardware and tools required for assembly

Specifications:

Rotation	+/- 90 degrees (optional +/- 120)
Over-Rotation Protection	Left and right limit switches prevent over-rotation.
Rotation Speed	180 degrees in 8.5 Sec
Rotational repeatability	+/- 1 degrees
Payload	90 lbs.
Mounting to Teleprompting Hood and camera assemblies	Detachable Monitor Adapter plate provides: ❑ Standard VESA 75- or 100-mm mounting. ❑ Additional mounting holes for non-standard hood/camera assemblies.
Mounting to Pedestal Or Tri-pod	❑ 3/8" mounting for dovetail ❑ 1/2"-20 mounting holes
Control	❑ Wide variety of PTZ camera controllers that conform to either the VISCA-IP or VISCA-Serial standards ❑ PC Based Software ❑ Touchscreen Controller ❑ Manual toggle switch for Pan Left/Right
Control Interface	❑ 10/100 Mbps Ethernet ❑ Standard RJ45 connector
LAN Configuration	❑ Built in HTML server ❑ Free Windows based PC app ❑ Supported LAN Protocols: 1. UDP 2. TCP/IP 3. Static IP
Power input	❑ +24V, 3Pin XLR connector ❑ On/Off power switch ❑ Red power indicator LED
AC System Power	❑ Input Voltage:100-240 VAC 50/60 Hz ❑ UL and CE certified external wall supply
Weight (not including hood)	❑ 7lbs.
Certifications	RoHS compliant, UL-listed components. Power supply UL and CE approved.
Warranty	Three years from date of purchase, parts and labor

TeleSpinIP Dimensions

